
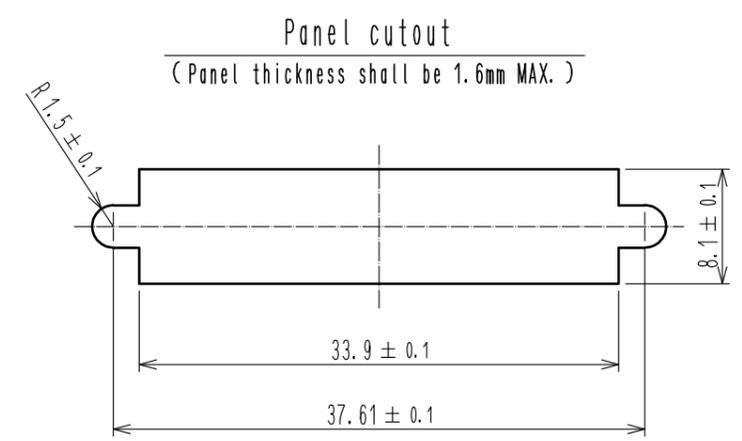
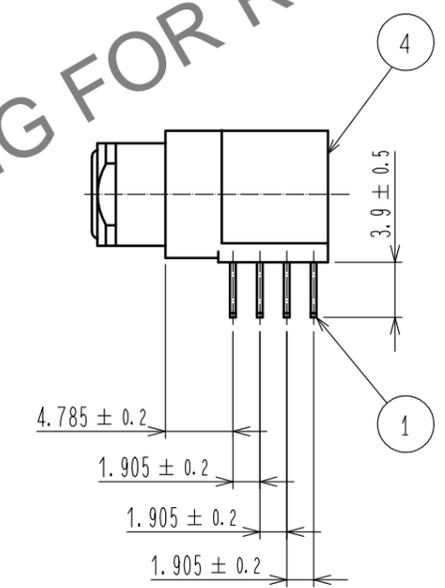
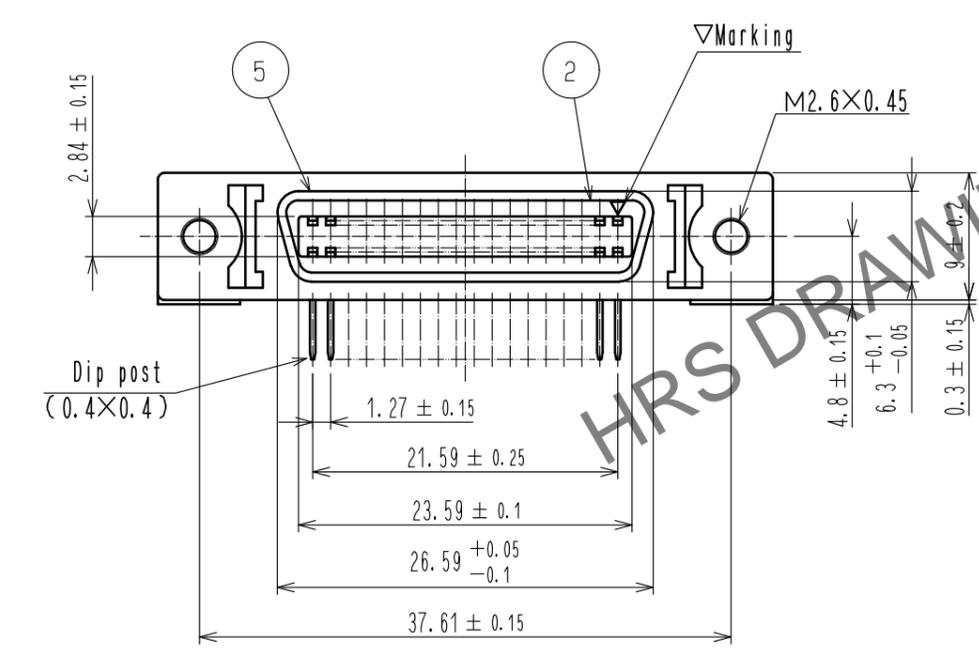
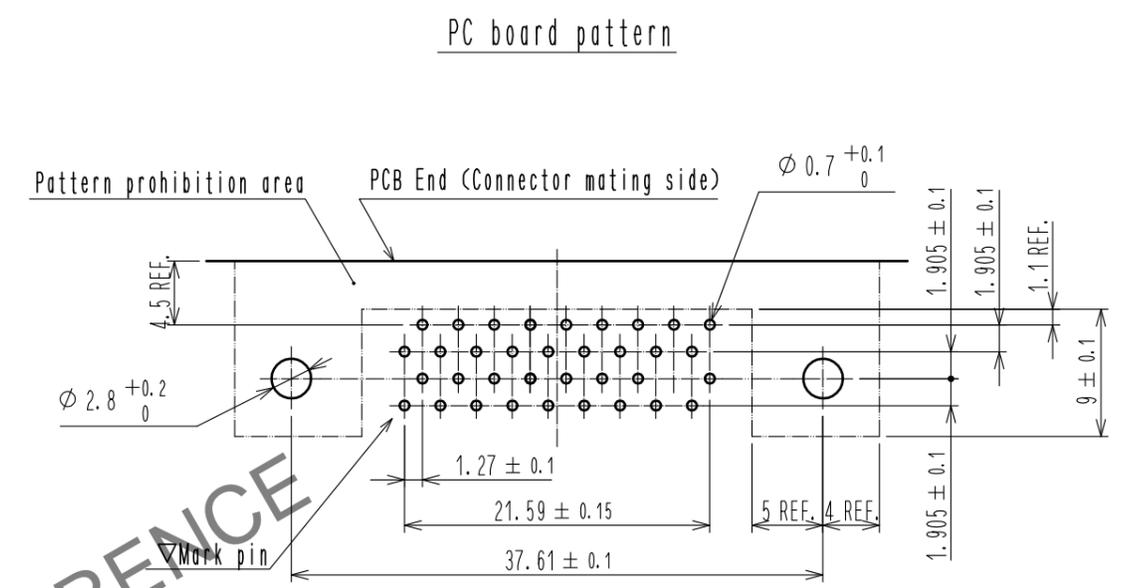


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

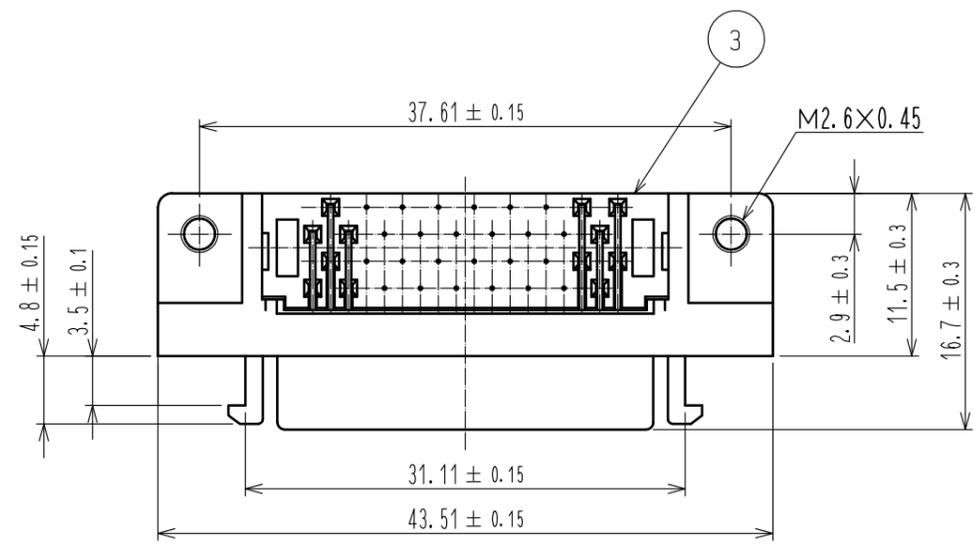

HRS DRAWING FOR REFERENCE

2	PBT	Black . UL94V-0	5	Steel	Over : Nickel plating 1μm min Under : Copper plating 5μm min
1	Phosphor bronze	Contact area : Gold plating 0.3μm min Lead : Gold plating 0.03μm min Under : Copper plating 2μm min	4	Zinc alloy die casting	Over : Nickel plating 2μm min Under : Copper plating 10μm min
			3	PBT	Black . UL94V-0
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	
		APPROVED : KI. NAGANUMA	18.06.27	DRAWING NO. EDC-029938-50-03	
HIROSE ELECTRIC CO., LTD.		CHECKED : KI. NAGANUMA	18.06.27	PART NO. DX10M-36S(50)	
		DESIGNED : TA. TORIHARA	18.06.26	CODE NO. CL230-5003-4-50	
		DRAWN : TA. TORIHARA	18.06.26		