

Customer Information Sheet

DRAWING No.: S0981-46R

SHEET 2 OF 2

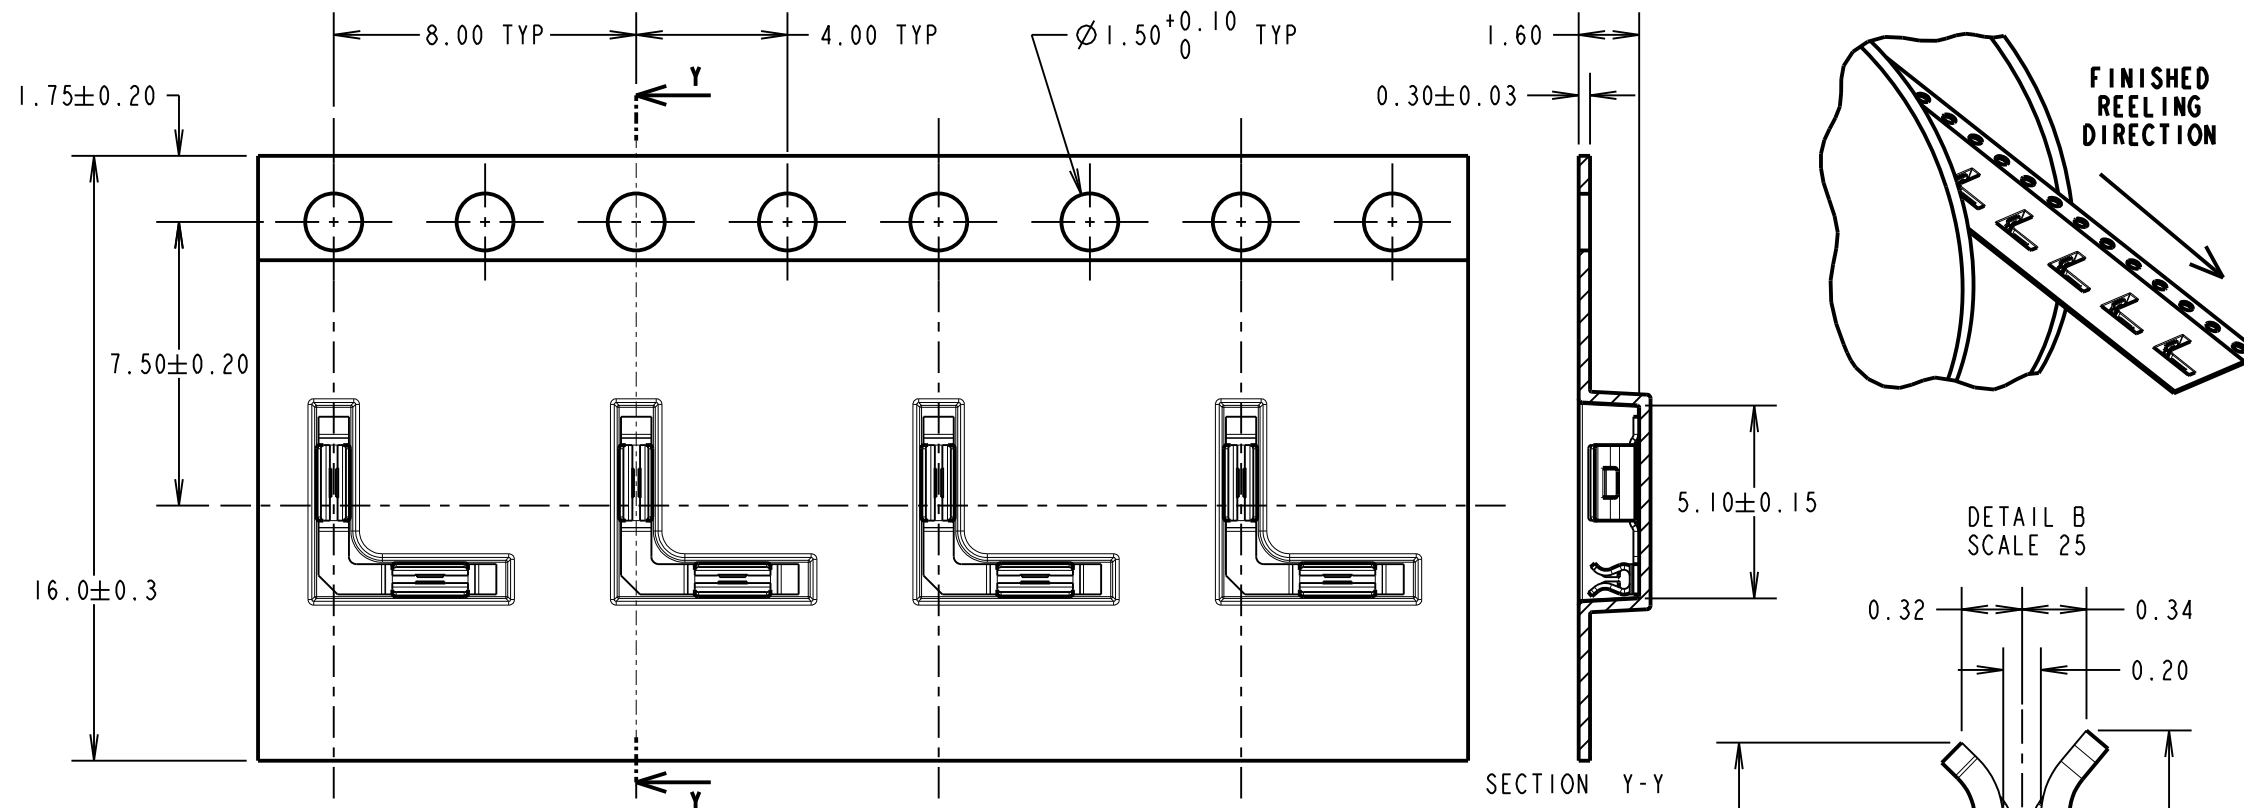
IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

**SPECIFICATION:****MATERIAL:**

CONTACT = STAINLESS STEEL

FINISH:

2.0µm - 3.0µm TIN OVER

0.4µm - 1.2µm NICKEL.

ELECTRICAL:

RESISTANCE = 100mΩ MAX

MECHANICAL:

INSERTION FORCE = 19.6N MAX

WITHDRAWAL FORCE = 0.98N MIN

DURABILITY = 10 CYCLES

ENVIRONMENTAL:

OPERATING TEMPERATURE = -25°C TO +150°C

STORAGE TEMPERATURE = -40°C TO +85°C

PACKAGING:

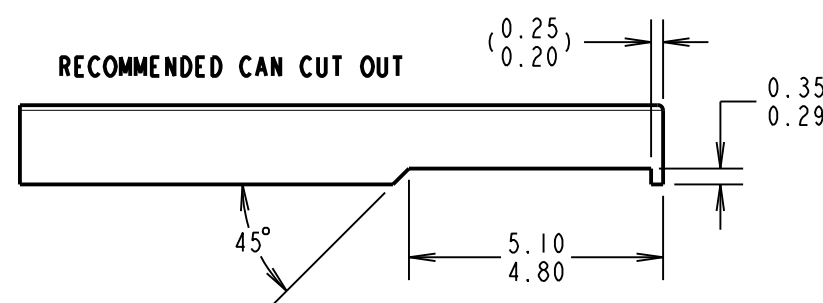
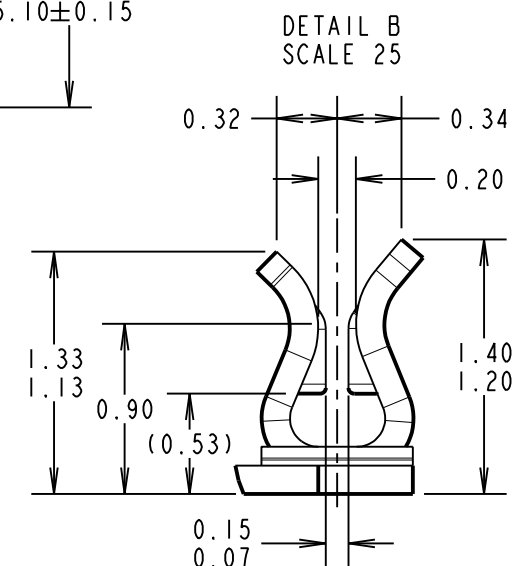
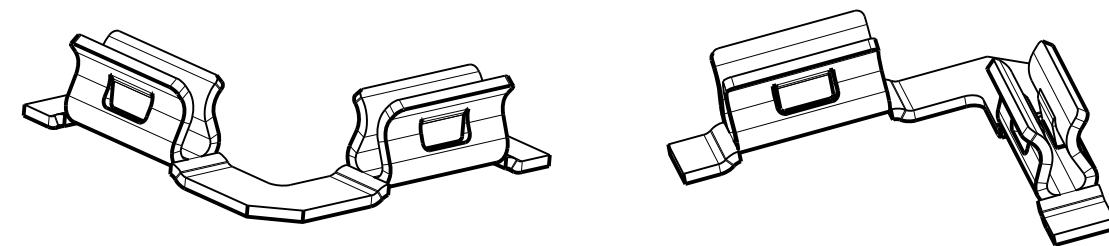
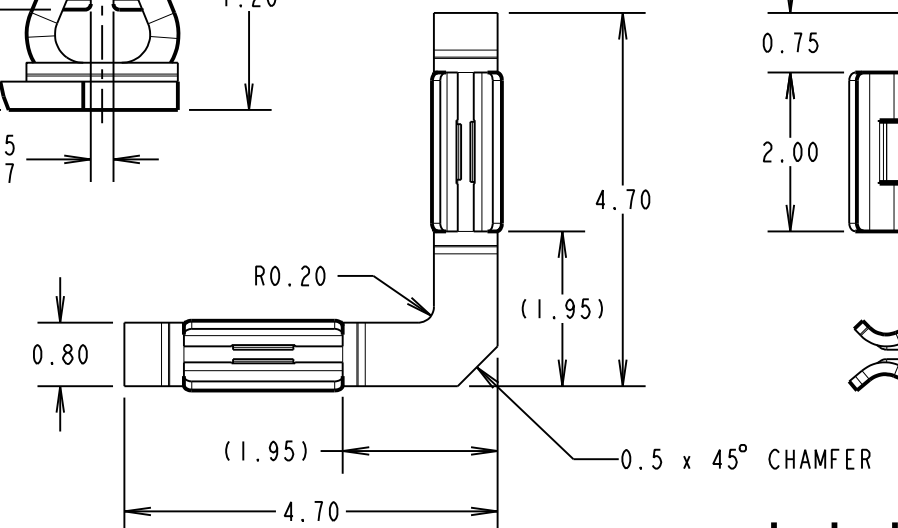
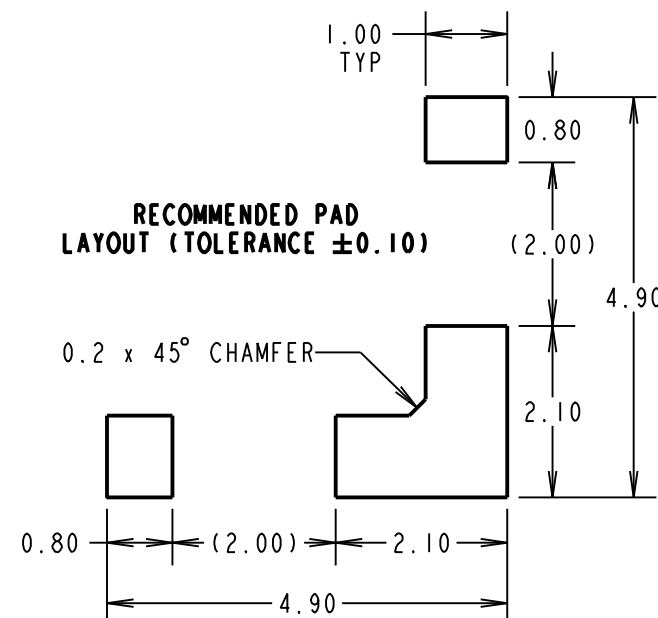
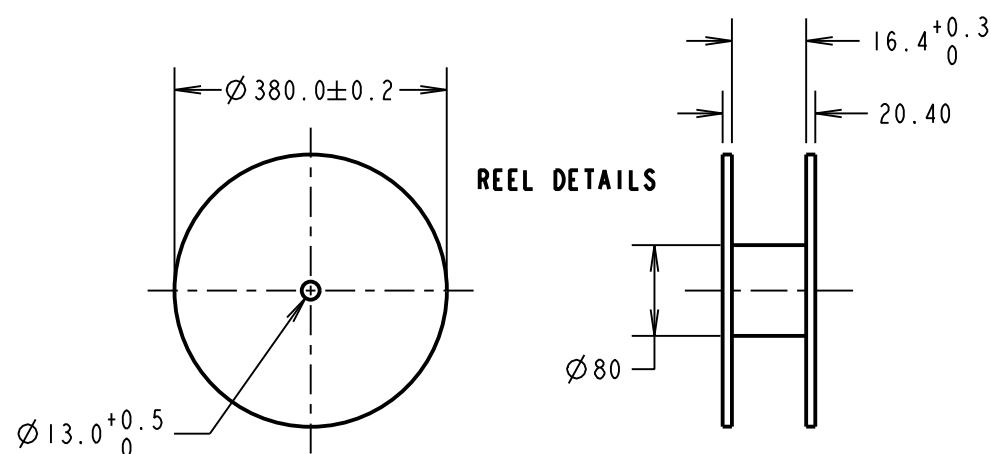
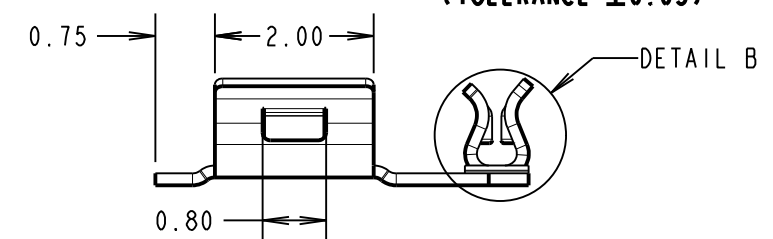
6,000 PARTS IN TAPE AND REEL,

9 REELS PACKED IN BOX.

NOTES:

1. MAXIMUM PERMISSIBLE BURR IS 0.03mm MAX.

2. FOR USE WITH 0.20 - 0.25mm THICK SHIELD CANS.

**RECOMMENDED PAD LAYOUT (TOLERANCE ±0.10)****COMPONENT DETAILS (TOLERANCE ±0.05)****HARWIN**www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCESX. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED**MATERIAL:**

SEE ABOVE

FINISH: SEE ABOVE

S/AREA:

mm²**TITLE:**

90° SURFACE MOUNT RFI SHIELD CLIP IN TAPE AND REEL

DRAWING NUMBER:

S0981-46RSHT
2 OF 2

MSP	3	28.09.16	13439
NAME	ISS.	DATE	C/NOTE
APPROVED:		M.PERREN	
CHECKED:		S.BENNETT	
DRAWN:		S.BENNETT	
CUSTOMER REF.:			
ASSEMBLY DRG:			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Harwin:

S0981-46R