

ATC HP 0402 Series High Performance NPO Ceramic MLCS

Electrical Characteristics:

Capacitance Range: 0.2 pF to 30 pF @ 1 MHz


Temperature Coefficient of Capacitance: 0 ± 30 ppm/°C (-55° to +125°C)

Insulation Resistance (IR) $10^{12} \Omega$ min. @ 25°C and rated WVDC
 $10^{11} \Omega$ min. @ 125°C and rated WVDC

Dielectric Working Voltage (DWV): 250% of rated WVDC


Working Voltage (WVDC) 50 WVDC

ATC offers the new HP Series high performance family of MLC ceramic capacitors. Built in a rugged ceramic SMT package, these products deliver high performance at the right price. The HP series is available in four popular EIA case sizes and is suitable for tuning, DC blocking, coupling and bypassing over the full range of wireless frequencies. All HP Series products are RoHS compliant.

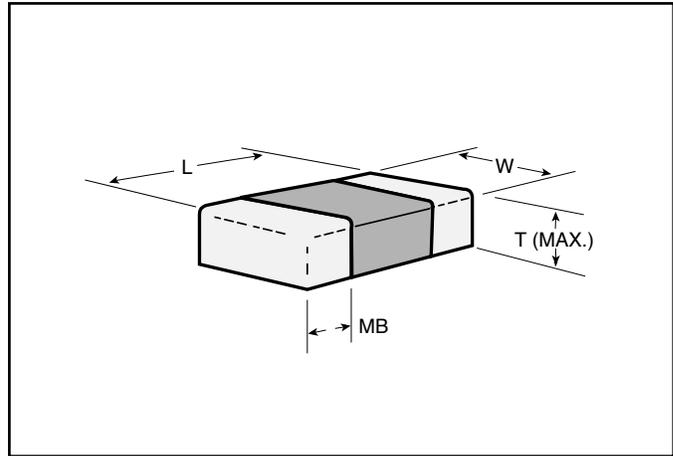


Case Size	0402
Length (L)	0.039 ±0.004 (1.00 ±0.1)
Width (W)	0.020 ±0.004 (0.50 ±0.1)
T Max.	0.024 (0.6)
Term. (MB) Max.	N/A

**TYPICAL ESR vs. FREQUENCY
HP SERIES 0402**

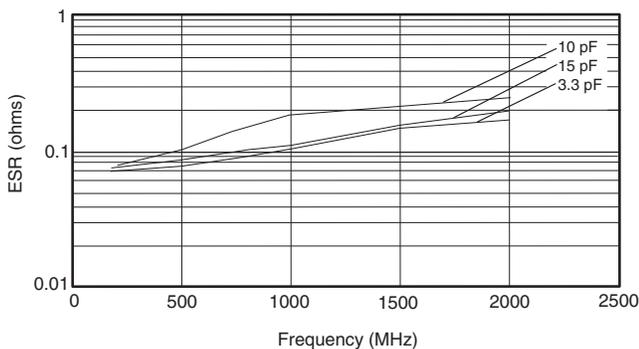

**TYPICAL SERIES RESONANT FREQUENCY
HP SERIES 0402**

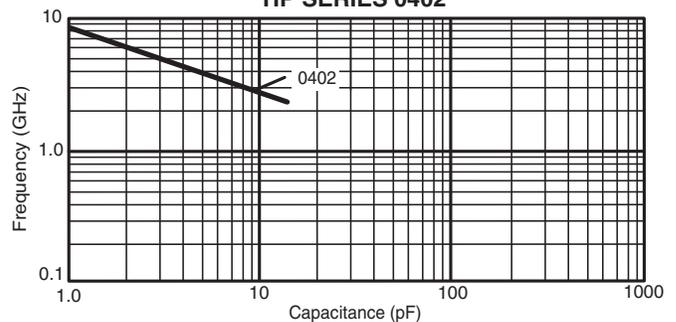

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
saleseur@atceramics.com

ATC Asia
sales@atceramics-asia.com


www.atceramics.com

ATC HP 0402 SERIES HIGH PERFORMANCE NPO CERAMIC MLCS

Capacitance Values:

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC
0R2	0.2	B, C	50	1R4	1.4	B, C, D	50	3R3	3.3	B, C, D	50	100	10	F, G, J	50
0R3	0.3			1R5	1.5			3R6	3.6			110	11		
0R4	0.4			1R6	1.6			3R9	3.9			120	12		
0R5	0.5			1R7	1.7			4R3	4.3			130	13		
0R6	0.6			1R8	1.8			4R7	4.7			150	15		
0R7	0.7	B, C, D		1R9	1.9			5R1	5.1			180	18		
0R8	0.8			2R0	2.0			5R6	5.6			200	20		
0R9	0.9			2R1	2.1			6R2	6.2			220	22		
1R0	1.0			2R2	2.2			6R8	6.8			240	24		
1R1	1.1			2R4	2.4			7R5	7.5			270	27		
1R2	1.2			2R7	2.7			8R2	8.2			300	30		
1R3	1.3			3R0	3.0			9R1	9.1						

Part Number Code

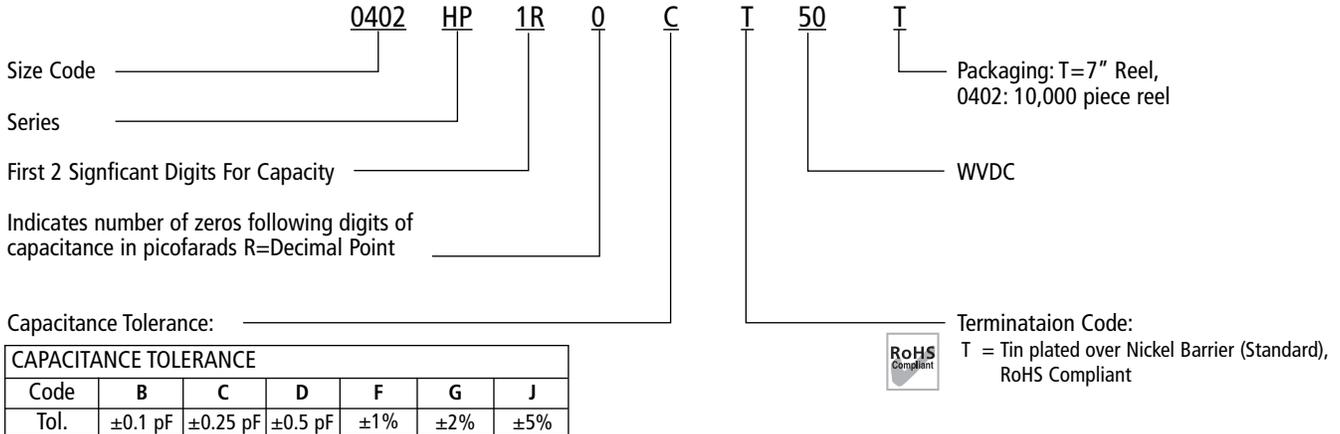

The above part number refers to an ATC HP 0402 Series 1.0 pF capacitor, C tolerance (±0.25 pF), 50 WVDC, with T termination (Tin Plated over Nickel Barrier), on 7 inch reel.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700. Consult factory for additional performance data.

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale(ATC document #001-992 Rev. B 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 2011 American Technical Ceramics. All Rights Reserved.

Excerpt from ATC 001-1103 Rev. C; 7/12

A M E R I C A N T E C H N I C A L C E R A M I C S
 ATC North America sales@atceramics.com
 ATC Europe saleseur@atceramics.com
 ATC Asia sales@atceramics-asia.com

www.atceramics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[American Technical Ceramics \(ATC\):](#)

[402NPO102JT2AT](#) [0402HP100GT50T](#)